ORION UAFX TAPE ECHO

LED
Lit when echo is on

DELAY
Tape echo rate

MIX
Tape echo level – 100% wet at max

TAPE
Age and character – interacts with wonk

WONK
Wow & flutter – interacts with tape age

FEEDBACK
Echo repeats – self-oscillates at higher settings

RECORD LEVEL
Tape color – increase for more distortion

FOOTSWITCH
Toggles echo on/off

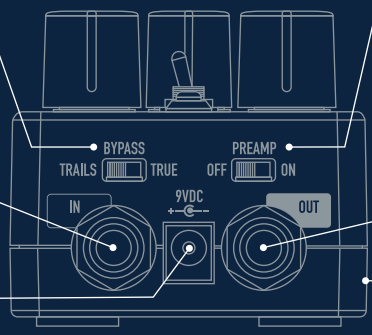

PREAMP
On (Trails bypass)
Preamp is always on dry signal
On (True bypass)
Preamp is on dry signal when pedal is on
Off (True and Trails bypass)
Preamp is never on dry signal

BYPASS
Trails: Delays play out naturally when bypassed
True: Delays stop immediately when bypassed

IN
Connect cable from guitar or other gear

OUT
Connect cable to amp or other gear

9VDC POWER IN
Connect 250 mA isolated power supply (sold separately)

USB-C (side)
Connect to computer for firmware updates with UA Connect app

Power Supply Isolated 9VDC, center-negative, 250 mA minimum, 2.1x5.5 mm barrel connector (sold separately)

Get More Find firmware updates and complete docs at **uaudio.com/uafx/start**

UNIVERSAL AUDIO